





ROKU® System AWM II Light

Fire protection collar for the penetration sealing of plastic pipes.

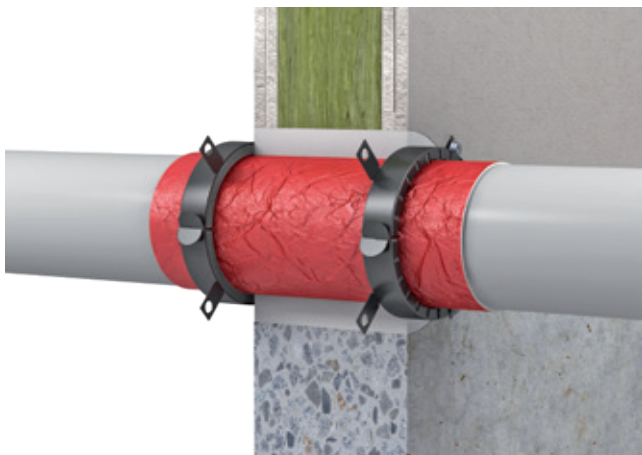

Allowed services

| Media lines | | max. diameter* |
|---|-------------------|----------------|
|  | Combustible pipes | ≤ 160 |

*All specifications in mm

Fire resistance class

max. EI 120 acc. to EN 13501-2

Field of Application

- Plasterboard wall, solid wall, floor

Products



ROKU® AWM II Light Fire protection collar

- 32 mm - Art. no. 01141032
- 40 mm - Art. no. 01141040
- 50 mm - Art. no. 01141050
- 63 mm - Art. no. 01141063
- 75 mm - Art. no. 01141075
- 90 mm - Art. no. 01141090
- 110 mm - Art. no. 0114110
- 125 mm - Art. no. 01141125
- 140 mm - Art. no. 01141140
- 160 mm - Art. no. 01141160

System data

| | | |
|------------------------------|-------|-------------|
| Certificate of usability | | ETA-11/0208 |
| Thickness structural element | Wall | ≥ 100 |
| | Floor | ≥ 150 |

All specifications in mm



PYRO-SAFE® GFM Fire protection mortar

25 kg Bag - Art. no. 01167030

Please contact us for further information:

- ✉ Information: global@svt.de Orders: order@svt.de
- ☎ +49 4105-40 90-0

Errors, misprints and changes reserved. All specifications reflect the state of the art or the version of the standard applicable at the time of going to press (06.2020). We will gladly provide you with information on request regarding the legal and technical framework conditions or manufacturer specifications applicable to your individual case. © Copyright svt Unternehmensgruppe, Seevetal. ROKU® is a registered trademark of the svt group, Seevetal.